



MarTek Limited
 4782 Chimney Drive
 Charleston, WV 25302
 P: (304) 965-9220
 marteklimited.com



CHL1

Remote Switch Operator

Part Numbers:
 CHL1 -30C (Cabled)

For:
Cutler-Hammer
F2100 Series MCC
 Also compatible with:
 Advantage, and (Westinghouse)
 Series 2100 / 5 Star MCC's.

Take Safety Further.

The LongArm® CHL1 is for use with Cutler-Hammer F2100 Series disconnect switches. The actuator attaches/detaches over the disconnect switch in seconds and is held firmly in place magnetically. No pre-positioning or modification to the switch gear handle position is required. CHL1 is equipped to operate the motor control centers with the L frame up to 400 amp. The unit is powered by AA batteries located in the hand-held controller. *See next page for complete part numbers and ordering information.*

What do you get?

The model includes: actuator, 30' cable, hand-held controller, batteries, a durable watertight Pelican-brand carrying case, and instruction manual.

Options:

- 50' Cable Option (*Customer to determine required cable length.*)

Attaches in Seconds:



Position actuator over control switch



Turn magnets to engage



MartekLimited.com

MARTEK


Arc Flash Safety

marteklimited.com

Specifications:

Voltage	24 VDC, (16) AA Alkaline Batteries (located in the hand-held controller)
Weight	CHL 1 Actuator: 7.4 lbs. / 3.36 kg; Total Kit w/ carrying case: 19lbs / 8.6kg
Magnet	Two magnets, 150lbs/69kg magnet strength each, 18.5lbs/8.4kg sheer load
Total kit Weight	19 lbs. / 8.6 kg
Projected Life	10,000+ Operations
Carrying case	Manufactured by Pelican with the following features: Two Press & Pull Latches, Double-layered Soft-grip Handle, Two Pad lockable Hasps Vortex® Valve Flush, Powerful Hinges, Lightweight Strong HPX® Resin Watertight, Meets airline regulations for carry-on luggage Exterior Dimensions 20" x 16" x 7.5" (50.8 x 40.6 x 19.1cm)
Warranty	One-year manufacturer warranty against defects related to quality and manufacturing

Mounting Footprint:

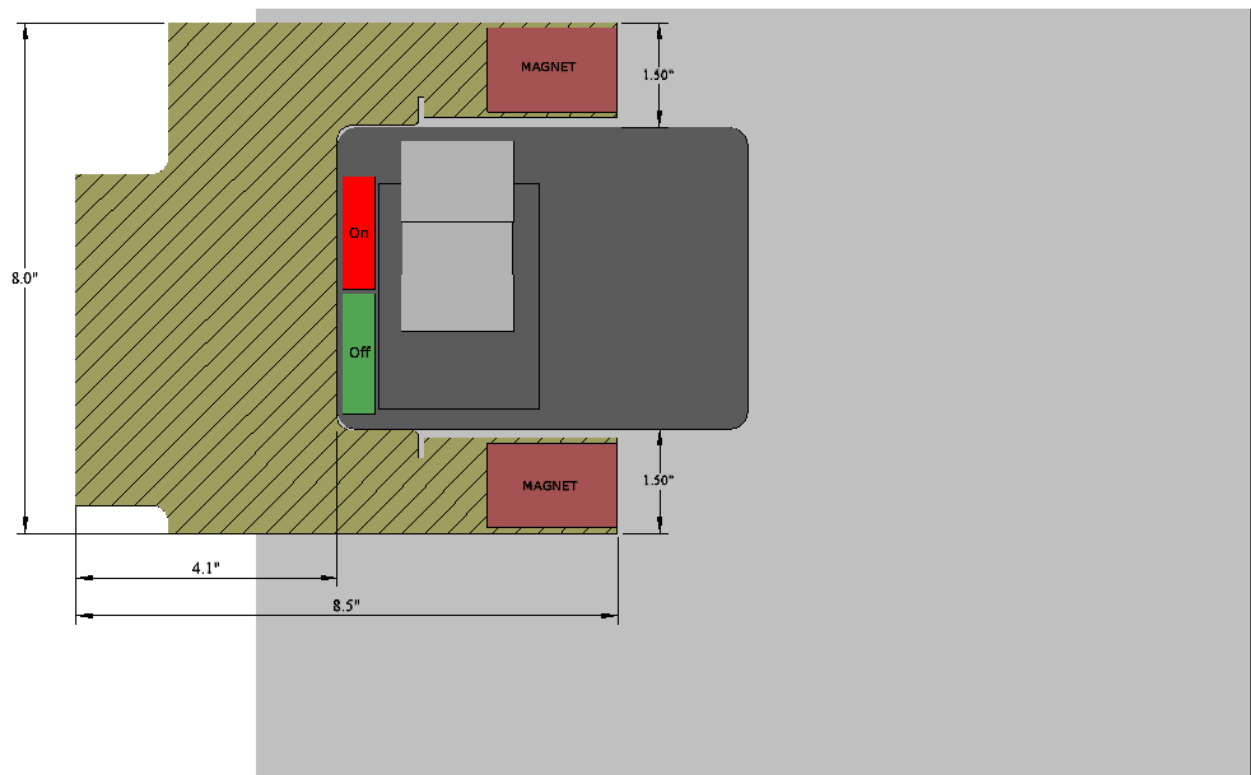

Contact:

sales@marteklimited.com

800-248-4958

MARTEK

Arc Flash Safety